


Flow Sensitive Regulating Unloader

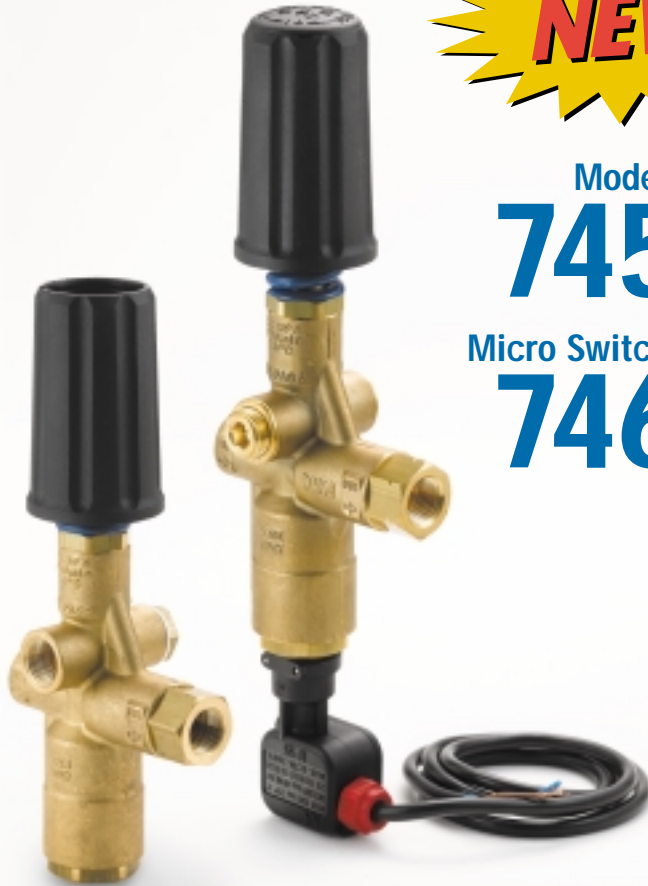

Model
7450
Micro Switch Model
7460

Advanced Design Flow Sensitive Unloader for the Pressure Washer Market

- Single valve for wide range of flows.
- Advanced design is easy to install and adjust. No special orifice or adjustment required.
- Nominal pressure spikes for smooth operation and long life.
- Reduces operator stress with smooth startup.
- Provides system pressure setting and protection for single gun (non-weep) pump installations.
- Reduced pressure loss thru the valve for more cleaning power.
- PTFE dynamic seals for extended life and smooth operation.
- Compact and lightweight design.

SPECIFICATIONS	U.S. Measure	Metric Measure
Flow Range.....	2.4 to 10.5 GPM	9 to 40 L/M
Maximum Pressure	4000 PSI	275 BAR
Maximum Temperature.....	195°F	90°C
Inlet Port	3/8" NPTF	3/8" NPTF
Outlet Port	3/8" NPTF	3/8" NPTF
By-pass Port (2)	3/8" NPTF	3/8" NPTF
7450 Weight	39.2 oz	1.11 kg
7450 Dimensions	3.54 x 1.97 x 8.65"	90 x 50 x 219.8 mm
7460 Weight	43.2 oz	1.22 kg
7460 Dimensions	3.54 x 1.97 x 11.21"	90 x 50 x 284.8 mm

www.catpumps.com • email: techsupport@catpumps.com

1681 - 94th Lane NE, Minneapolis, MN 55449-4324 • Phone: 763-780-5440 • Fax: 763-780-2958



The Pumps with Nine Lives