


# MODEL 7CP6160CS PLUNGER PUMP

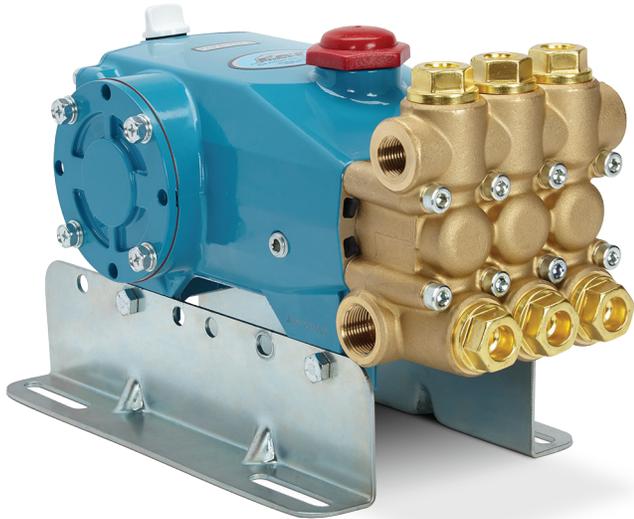

10.6 GPM | 2,500 PSI

## Designed for the most demanding high-pressure applications

Cat Pumps are the #1 choice for high-pressure applications when quality counts. Don't fall into the price trap by choosing a less expensive pump upfront that will cost more in the long run. Get more work done without the hassles and downtime — choose Cat Pumps.

Cat Pumps engineers have optimized every detail to produce a dependable pump with excellent service life. Concentric, high-density polished solid plungers provide a true wear surface that results in long seal life. The drive-end uses matched connecting rods and oversized bearings to provide many hours of trouble-free service. The 7CP6160CS is what you expect from Cat Pumps — high quality, dependable products backed by the industry's best customer service and support.

### Features

- V-packings and low pressure seals are completely lubricated and cooled, greatly increasing pump life
- Flexible Drive options
  - Electric Motor
    - › Belt with standard pulley or clutch
    - › Direct Drive with bell housing and flex coupler
  - Gas or Diesel Engine
    - › Belt with standard pulley or clutch
    - › Gearbox for 1" or 1 1/8" engine shafts
  - Hydraulic Motor
    - › Direct Drive with bell housing and flex coupler

### Typical Applications:



- Water Jetting
- Hydro Excavation
- Wash Down
- Surface Preparation

## Specifications

	US MEASURE	METRIC MEASURE
Flow	10.6 gpm	40.1 lpm
Pressure	2500 psi	172 bar
Pump RPM*	1750 rpm	1750 rpm
Inlet Pressure Range	Flooded to 70 psi	Flooded to 4.8 bar
Max Liquid Temperature	140° F	60° C
Inlet Ports (2)	¾" NPT(F)	¾" NPT(F)
Discharge Ports (2)	½" NPT(F)	½" NPT(F)
Weight	30.8 lbs	14 kg
Dimensions	13.48 x 9.21 x 6.83"	343 x 234 x 174 mm

\*Pump minimum is 100 RPM.

## Dimensions

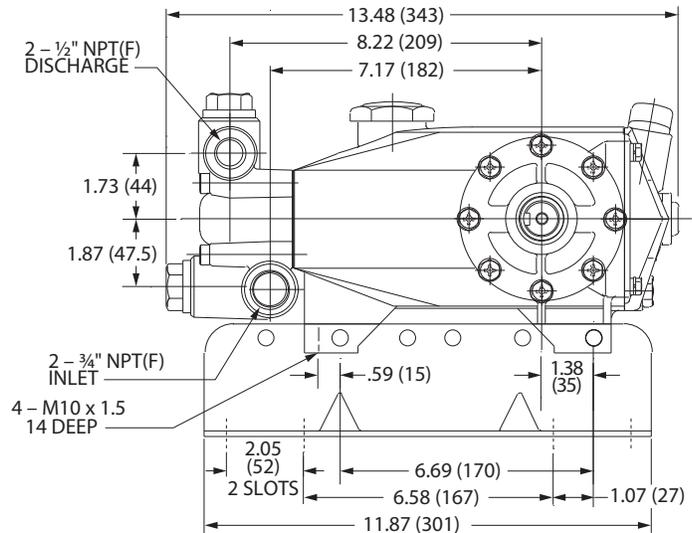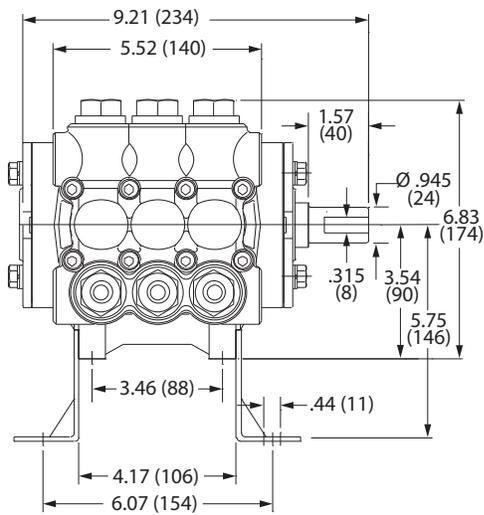

## Popular Accessories



**Unloader**  
PN 7537  
1 – 21 gpm  
406 – 2320 psi



**Pop-off Valve**  
PN 9940  
0 – 25 gpm  
1000 – 4000 psi



**Pressure Gauge**  
PN 6089  
0 – 6000 psi



**Thermal Valve**  
PN 7142  
25 gpm Max  
145° F



**Oil**  
PN 6107  
21 oz. Bottle  
Specially Formulated for  
Extended Protection

Contact Cat Pumps for more information at [info@catpumps.com](mailto:info@catpumps.com) or (763) 780-5440



**CAT PUMPS**  
1681 – 94TH LANE N.E. MINNEAPOLIS, MN 55449-4324  
PHONE (763) 780-5440 — FAX (763) 780-2958  
[info@catpumps.com](mailto:info@catpumps.com) | [www.catpumps.com](http://www.catpumps.com)