


MODEL 3550 PLUNGER PUMP

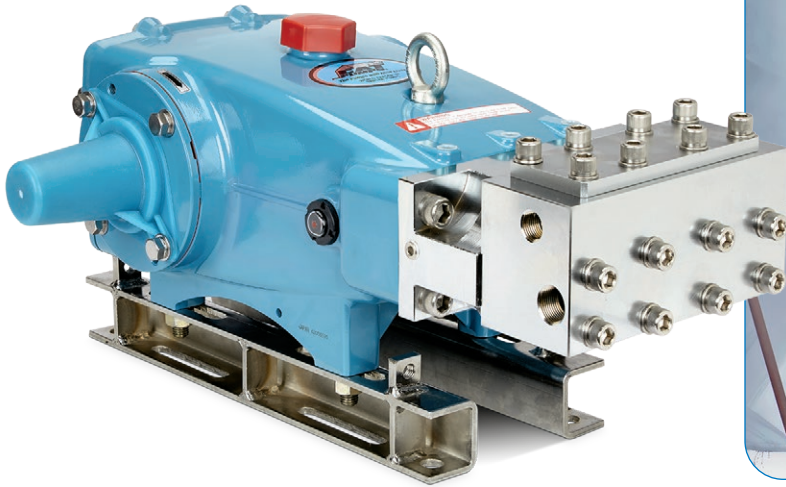

10 GPM | 6,000 PSI

Designed for Maximum Dependability

Cat Pumps Model 3550 raises the bar for high-performance, high-pressure pumps. The Model 3550 is the perfect pump for demanding applications requiring long-life and dependable performance. At 6,000 psi/414 bar, this pump matches well to demanding applications such as hydrostatic and destruct testing.

Using advanced engineering design software, Cat Pumps engineers have optimized every detail to produce a pump with incredible service life. Concentric, high-density polished solid ceramic plungers provide a true wear surface that results in long seal life. The drive end uses matched connecting rods and oversized bearings to provide thousands of hours of trouble-free service.

The 3550 is what you expect from Cat Pumps — high quality, dependable products backed by the industry's best customer service and support.

Features:

- V-Packings and low-pressure seals are completely lubricated and cooled, greatly increasing service life.
- Pump high-pressure manifold is easily serviced without entering crankcase, reducing field service time.
- Oversized crankshaft bearings with greater loading capacity provide longer bearing life.
- Chrome-plated brass manifolds for corrosion resistance and high strength.


Typical Applications:

- Hydrostatic and Destruct Testing
- Water Jetting
- High-Pressure Tooling
- Water Blasting
- High-Pressure Injection
- Surface Preparation
- Parts Cleaning

Specifications

	US MEASURE	METRIC MEASURE
Flow	10.0 gpm	38 lpm
Pressure	6000 psi	414 bar
RPM	940	940
Inlet Pressure Range	Flooded - 70 psi	Flooded - 4.9 bar
Max Liquid Temperature	140°F	60°C
Inlet Ports (2)	¾" NPT(F)	¾" NPT(F)
Discharge Ports (2)	½" NPT(F)	½" NPT(F)
Weight	124 lbs	56.4 kg
Dimensions	24.17 x 18.11 x 9.72"	614 x 460 x 247 mm

Dimensions

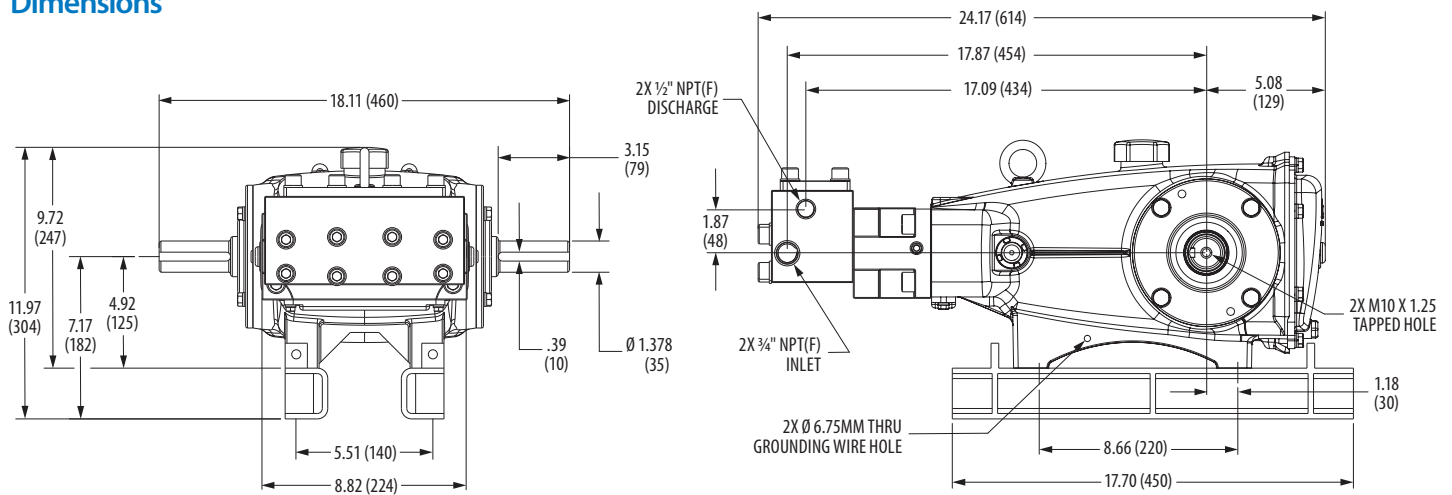

Popular Accessories



Pressure Regulator
PN 7366
10 – 12 gpm
3,000 – 6,000 psi



Relief Valve
PN 7196
0 – 21 gpm
725 – 7,252 psi



Pressure Gauge
PN 6089
0 – 6,000 psi



Pulsation Dampener
PN 6011
100 – 7,200 psi



Oil
PN 6107
21 oz. Bottle
Specially-Formulated
for Extended Protection

Contact Cat Pumps for pricing or more information at info@catpumps.com or (763) 780-5440



CAT PUMPS
1681 – 94TH LANE N.E. MINNEAPOLIS, MN 55449-4324
PHONE (763) 780-5440 — FAX (763) 780-2958
info@catpumps.com | www.catpumps.com