


# DATA SHEET

## DIRECT DRIVE PLUNGER PUMP



Brass Model: **66DX50G1I**

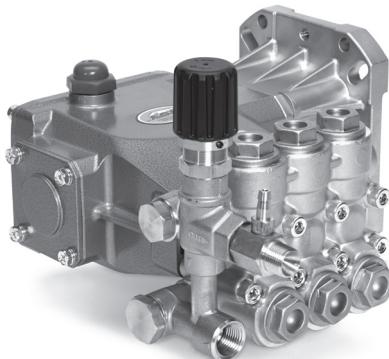

### FEATURES

- Triplex plunger design ensures high efficiency and low pulsation.
- Compact flange mount permits easy, direct mounting to most gas engines.\*
- Modular regulating unloader with built-in bypass ensures system pressure control and pump protection.\*\*
- Fixed chemical injector aids in cleaning flexibility.
- Pump comes standard with NBR seals. Alternative seal materials are available for higher temperature or chemical compatibility.

\*Gas Mounting Flange: SAE J609, Flange B, Extension 4 (1" Ø), Shaft Length = 3 1/4", Pilot Ø = 5 3/4", BC. Ø = 6 1/2", Thread 3/8"-16 UNC Tap

\*\*Available without an unloader (66DX50GG1)

SPECIFICATIONS		U.S. Measure		Metric Measure	
Flow		5.0 gpm		18.9 lpm	
Pressure Range		100–3500 psi		6.9–241 bar	
Pump RPM		3250 rpm		3250 rpm	
Inlet Pressure Range		Flooded to 75 psi		Flooded to 5.2 bar	
Max. Liquid Temperature		140° F		60° C	
Bore	0.629"		16 mm		
Stroke	0.421"		10.7 mm		
Crankcase Capacity	18.0 oz		0.53 l		
Inlet Ports (2)	1/2" NPT(F)		1/2" NPT(F)		
Discharge Ports (2)	3/8" NPT(F)		3/8" NPT(F)		
Shaft Diameter (Hollow)	1.0"		25.4 mm		
Engine Mounting Face	6.5"		6.5"		
Weight	26.15 lbs		11.9 kg		
Dimensions	11.73 x 10.51 x 8.15"		298 x 267 x 207 mm		

### TORQUE AND HORSEPOWER REQUIREMENTS

	FLOW		PRESSURE						PUMP RPM	
	GPM	LPM	PSI		BAR		PSI			
			2500	172	3000	207	3500	241		
Torque	5.0		13.8 ft-lbs		16.6 ft-lbs		19.4 ft-lbs		3250	
Horsepower*			11.0 hp		13.1 hp		15.4 hp			


\*HP is for estimate only. Torque values of the engine at given rpm should be used to determine correct size of engine.

Consult engine manufacture for actual torque available at required speed.

<b>DETERMINING THE PROPER TORQUE</b>	Torque (ft-lbs)	=	$3.6 \times \frac{\text{gpm} \times \text{psi}}{\text{rpm}}$
<b>DETERMINING THE REQUIRED HP</b>	Engine hp (Estimated)	=	$\frac{\text{gpm} \times \text{psi}}{1140}$
<b>DETERMINING THE PUMP RPM</b>	Rated gpm	=	$\frac{\text{Desired gpm}}{\text{Rated rpm}}$

Refer to pump **Service Manual** for repair procedure and additional technical information.

## EXPLODED VIEW

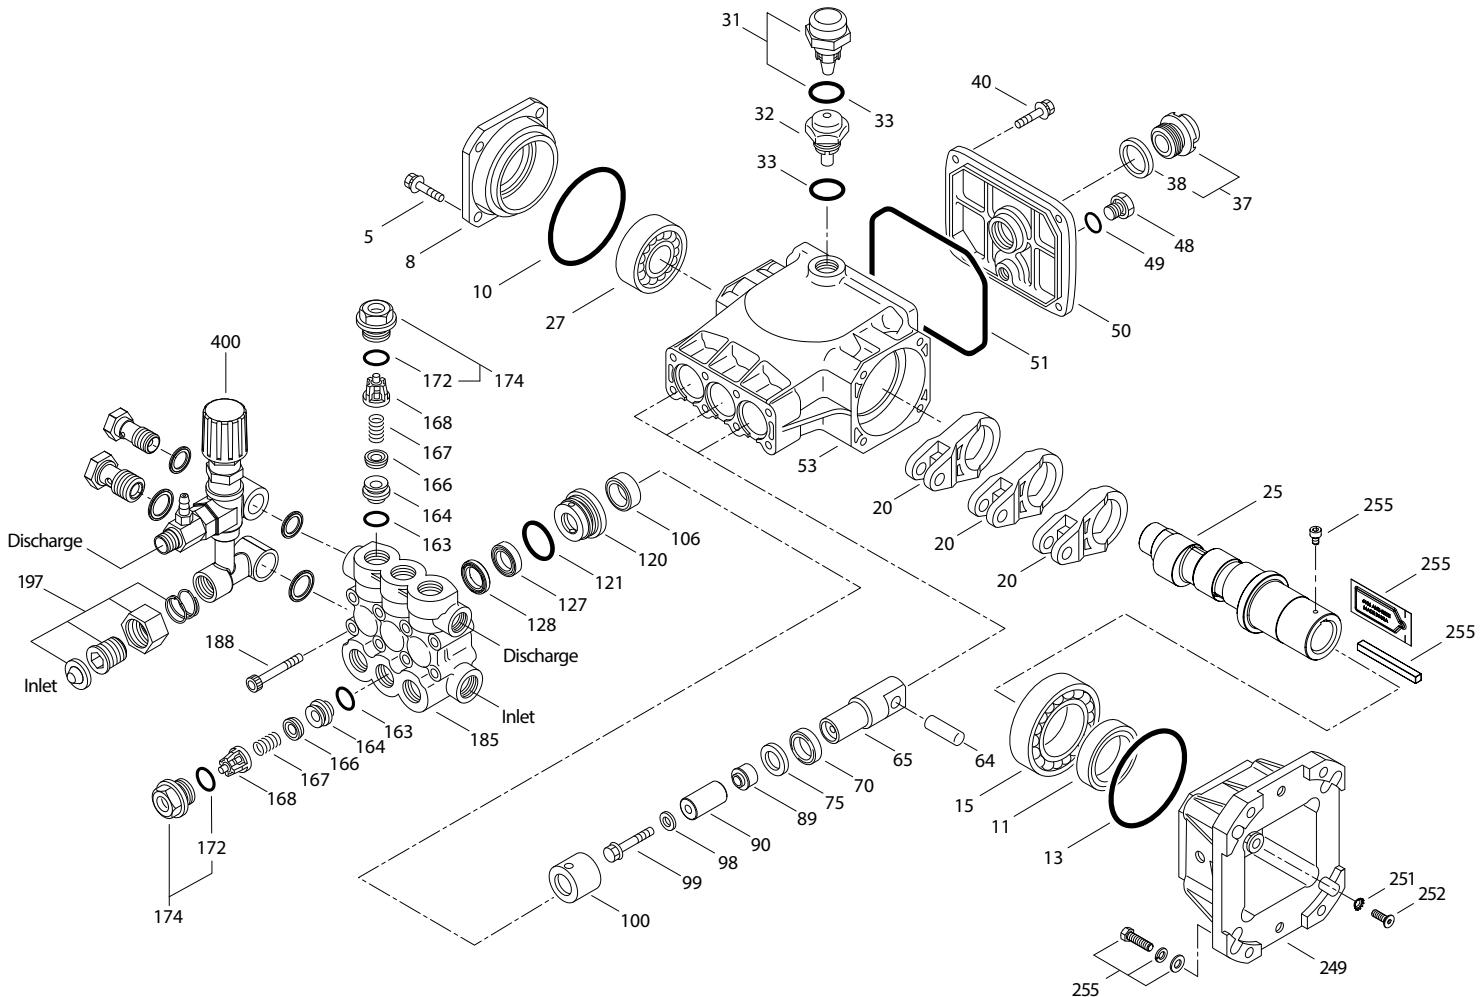

## PARTS LIST

ITEM	P/N	MATL DESCRIPTION	QTY
5	125824	STCP R Screw, HHC (M6 x 16) (See Tech Bulletin 074)	4
8	48259	AL Cover, Bearing	1
10	14028	NBR O-Ring, Cover, Bearing	1
11	125351	NBR Seal, Oil, Crankshaft	1
13	14037	NBR O-Ring, Cover, Bearing	1
15	146421	STL Bearing, Ball, Inner	1
20	48843	TNM Rod, Connecting	3
25	134953	CM Crankshaft, 1", (10.7mm)	1
27	14480	STL Bearing, Ball, Outer	1
31	127409	— Cap, Vented with O-Ring (Rain Cap)	1
32	46798	RTP Cap, Oil Filler, Domed	1
33	14179	NBR O-Ring, Oil Filler Cap	1
37	92241	PC Gauge, Bubble Oil with Gasket (See Tech Bulletin 074)	1
38	44428	NBR Gasket, Flat, Oil Gauge	1
40	125824	STCP R Screw, HHC (M6 x 16) (See Tech Bulletin 074)	4
48	25625	STCP Plug, Drain (1/4" x 19 BSP)	1
49	23170	NBR O-Ring, Drain Plug	1
50	48862	AL Cover, Rear	1
51	14048	NBR O-Ring, Cover, Rear	1
53	48830	AL Crankcase	1
64	46404	CM Pin, Crosshead	3
65	48845	BB Rod, Plunger	3
70	48911	NBR Seal, Oil, Crankcase	3
75	48754	NBR Slinger, Barrier	3
89	134955	BB Spacer	3
90	134351	CC Plunger (M16 x 30)	3
98	46730	NBR Washer, Seal	3

ITEM	P/N	MATL DESCRIPTION	QTY
99	49907	S Retainer, Plunger (See Tech Bulletin 074)	3
100	48755	NY Retainer, Seal	3
106	43316	NBR Seal, Low-Pressure with S-Spring	3
120	134959	BB Case, Seal	3
121	13980	NBR O-Ring, Seal Case	3
127	134958	SNG V-Packing	3
128	134957	NY Adapter, Male	3
163	14181	NBR O-Ring, Seat	6
164	134961	S Seat	6
166	46429	S Valve	6
167	134962	S Spring	6
168	46583	NY Retainer, Spring	6
172	49839	NBR O-Ring, Valve Plug	6
174	48760	BB Plug, Valve with NBR O-Ring (See Tech Bulletin 074)	6
185	134956	BB Manifold, Discharge	1
188	126512	STCP R Screw, HSH (M8 x 65) (See Tech Bulletin 074)	8
197	941517	BB Assembly, Garden Hose (1/2" NPT[M] x 3/4" GH[F])	1
249	48841	AL Flanger, Adapter	1
251	126746	STCP R Lockwasher, Conical (M8)	4
252	46403	STL Screw, FH (M8 x 25)	4
255	30510	STZP Assembly, Bolt Mount	1
300	76619	NBR Kit, Seal (Includes: 98, 106, 121, 127, 128)	1
310	76631	NBR Kit, Valve (Includes: 163, 164, 166, 167, 168, 172)	2
400	7860	BB Unloader, Modular with Fixed Injector	1
—	6107	— Oil, Bottle (21 oz) (Fill to Specified Crankcase Capacity Prior to Start-up)	1

*Italics are optional items. R Components comply with RoHS Directive.*

For additional technical information see [www.catpumps.com/literature/tech-bulletins](http://www.catpumps.com/literature/tech-bulletins).

MATERIAL CODES (Not Part of Part Number): AL=Aluminum BB=Brass CC=Ceramic CM=Chrome-moly NBR=Medium Nitrile (Buna-N)


NY=Nylon PC=Poly Carbonate RTP=Reinforced Composite S=304SS SNG=Special Blend (Buna) SS=316SS

STCP=Steel/Chrome Plated STL=Steel STZP=Steel/Zinc Plated TNM=Special High Strength

## MODEL 7860 UNLOADER WITH INJECTOR

### SPECIFICATIONS

	U.S.	Metric
Flow Range	3.0–5.0 gpm	11.4–18.9 lpm
PSI Range	700–4000 psi	50–275 bar
Inlet Port, Bottom	1/2" NPT(F)	1/2" NPT(F)
Discharge Port, Top	3/8" NPT(M)	3/8" NPT(M)
Weight	2.2 lbs	1.0 kg
Dimensions	4.5 x 1.38 x 6.5"	114 x 35 x 165 mm

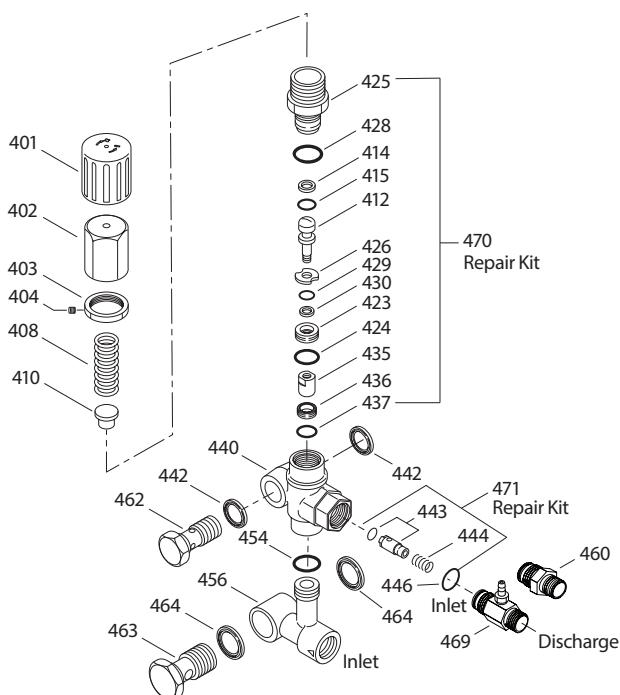

### PARTS LIST

ITEM	P/N	MATL	DESCRIPTION	QTY
401	49100	NY	Handle, Adjusting (Black)	1
402	49099	BB	Cap, Adjusting	1
403	125521	BB	Nut, Locking (M25 x 1)	1
404	88953	S	Screw, Set (M4 x 4)	1
408	45198	ZP R	Spring, Pressure	1
410	49101	STZP R	Retainer, Spring	1
412	49103	S	Stem, Piston	1
414	129638	PTFE	Backup Ring, Piston Stem	1
415	49104	NBR	O-Ring, Piston Stem	1
423	49105	BB	Retainer, Valve	1
424	49106	NBR	O-Ring, Valve Retainer	1
425	49102	BB	Retainer, Piston	1
426	49107	S	Washer	1
428	26133	NBR	O-Ring, Piston Retainer	1
429	22056	NBR	O-Ring, Valve Retainer	1
430	49123	D	Backup Ring, Valve Retainer	1
435	49383	S	Valve/Ball Assembly	1
436	49384	S	Seat	1
437	13965	NBR	O-Ring, Seat	1
440	—	BB	Valve Body	1
442	49121	STL	Washer, Seal (3/8")	2
443	49245	BB	Valve, Check with NBR O-Ring	1
444	117275	S	Spring, Check Valve	1
446	26133	NBR	O-Ring, Body	1
454	11346	NBR	O-Ring, Manifold	1
456	—	BB	Manifold	1
460	126974	BB	Fitting, Discharge (3/8" NPT(M))	1
462	49120	BB	Screw, Flo-Through (3/8" NPT(M))	1
463	49117	BB	Screw, Flo-Through (1/2" NPT(M))	1
464	49118	STL	Washer, Seal (1/2")	2
468	31708	NBR	Kit, O-Ring Includes: 414, 415, 424, 428–430, 437, 446, 454	1
469	7367	BB	Injector, Fixed, Chemical	1
470	31556	NBR	Kit, Repair (Includes: 412, 414, 415, 423–426, 428–430, 435–437)	1
471	76185	NBR	Kit, Check Valve (Includes: 443, 444, 446)	1


*Italics are optional items. R Components comply with RoHS Directive.*

MATERIAL CODES (Not Part of Part Number): BB=Brass D=Acetal  
NBR=Medium Nitrile (Buna-N) NY=Nylon PTFE=Pure Polytetrafluoroethylene  
S=304SS STL=Steel STZP=Steel/Zinc Plated ZP=Zinc Plated

## MODEL 7367 FIXED CHEMICAL INJECTOR

### SPECIFICATIONS

	U.S.	Metric
Flow Range	3.0–5.0 gpm	11.4–18.9 lpm
Nozzle Orifice	2.1 mm	2.1 mm
Hose Barb – Extension	1/4"	1/4"
Inlet Port	M20 x 1	M20 x 1
Discharge Port	3/8" NPT(M)	3/8" NPT(M)
Weight	0.25 lbs	0.11 kg
Dimensions	1.75 x 1.0 x 2.12"	44 x 25.4 x 54 mm

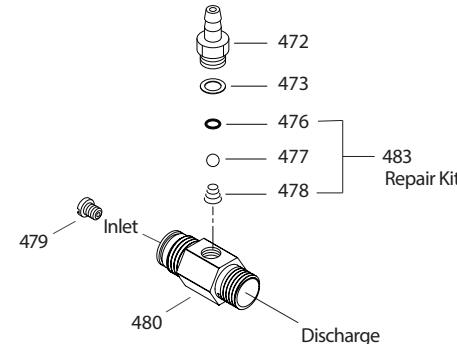

### PARTS LIST

ITEM	P/N	MATL	DESCRIPTION	QTY
472	49132	BB	Barb, Fix	1
473	—	—	Gasket	1
476	—	NBR	O-Ring, Barb	1
477	—	S	Ball	1
478	—	S	Spring	1
479	—	S	Orifice	1
480	—	BB	Body	1
483	76176	NBR	Kit, Repair (Includes: 476, 477, 478)	1

MATERIAL CODES (Not Part of Part Number):

BB=Brass NBR=Medium Nitrile (Buna-N) S=304SS

### CHEMICAL INJECTOR PERFORMANCE CHART

Pump Flow	Orifice Size	Maximum Injecting Pressure	Maximum Chemical Draw	Pressure Drop Across Orifice
5.0	2.1 mm	358 psi	76.8 oz/min	430 psi

Optimum performance of chemical injector occurs with a 35 ft high-pressure hose with a minimum 3/8" ID. The type of hose, extended lengths, reduced ID and fittings may create additional back pressures above the maximum injecting pressure rating of the injector and prevent it from drawing chemical.

### UNLOADER TYPE:

A modular regulating unloader with chemical injector comes with each 66DX pump to provide system pressure regulation, pump protection and metered chemical application.


### OPERATION:

Purge pump prior to operation by allowing liquid to flow through the pump without discharge restriction. Removing trapped air will ensure full system pressure can be obtained. Install a pressure gauge close to the manifold head to assist in setting and monitoring system pressure. Setting and adjusting the unloader pressure must be done with the system turned on. Start the system with the unloader backed off to the lowest pressure setting (counterclockwise direction). Squeeze the trigger and read the pressure on the gauge at the pump. Do not read pressure at the gun or nozzle. If more pressure is desired, release the trigger, turn adjusting cap one quarter turn in a clockwise direction. Squeeze the trigger and read the pressure. Repeat this process until the desired system pressure is reached. Thread the locking nut up to the adjusting cap and tighten the set screw. All high-pressure systems should have a secondary relief valve. Set the secondary relief valve 200–300 psi above the unloader setting.

**Note:** Pressure is not set at the factory.

### SERVICE:

The unloader should be serviced on the same schedule as the seals in the pump. Refer to 66DX Service Manual for start-up, servicing of seals and valves, torque requirements and Diagnosis/Maintenance chart.

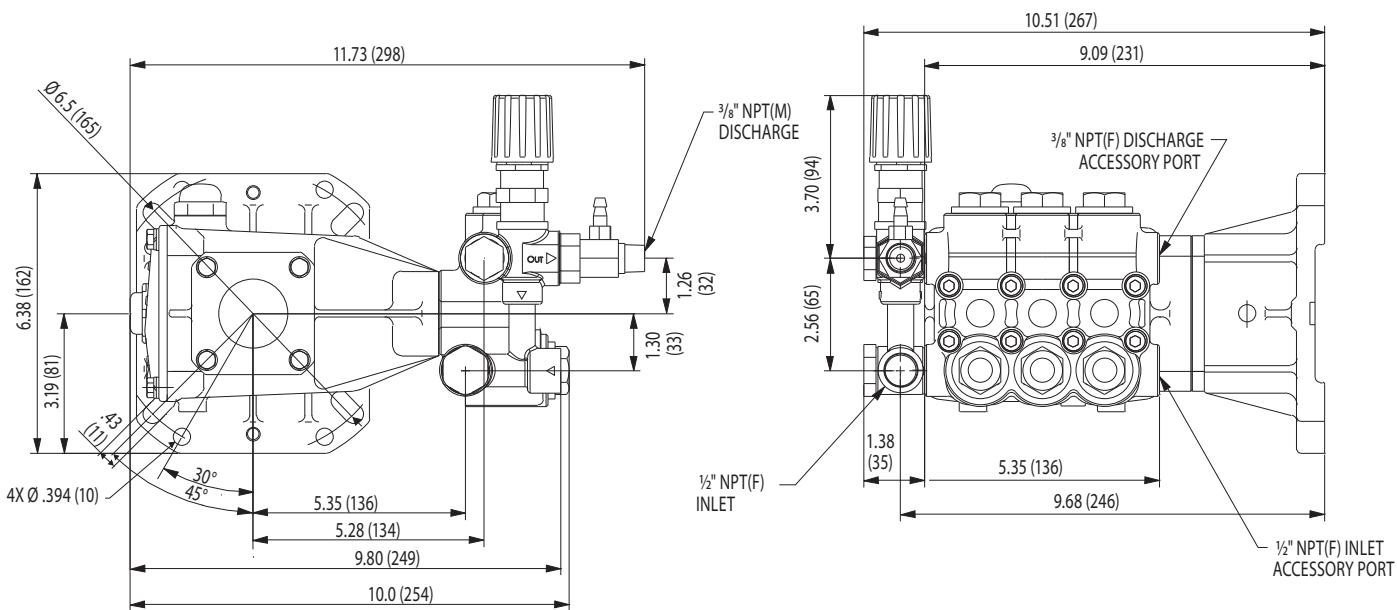

#### ⚠ CAUTIONS AND WARNINGS

All high-pressure systems require a primary pressure regulating device (e.g. regulator, unloader) and a secondary pressure relief device (e.g. pop-off valve, relief valve). Failure to install such relief devices could result in personal injury or damage to pump or property. Cat Pumps does not assume any liability or responsibility for the operation of a customer's high-pressure system.

Read all CAUTIONS and WARNINGS before commencing service or operation of any high-pressure system. The CAUTIONS and WARNINGS are included in each Service Manual and with each Accessory Data sheet. CAUTIONS and WARNINGS can also be viewed online at [www.catpumps.com/dynamic-literature/cautions-and-warnings](http://www.catpumps.com/dynamic-literature/cautions-and-warnings) or can be requested directly from Cat Pumps.

#### WARRANTY

View the Limited Warranty online at [www.catpumps.com/literature/cat-pumps-limited-warranty](http://www.catpumps.com/literature/cat-pumps-limited-warranty)