


MODEL 7CP6185CS PLUNGER PUMP

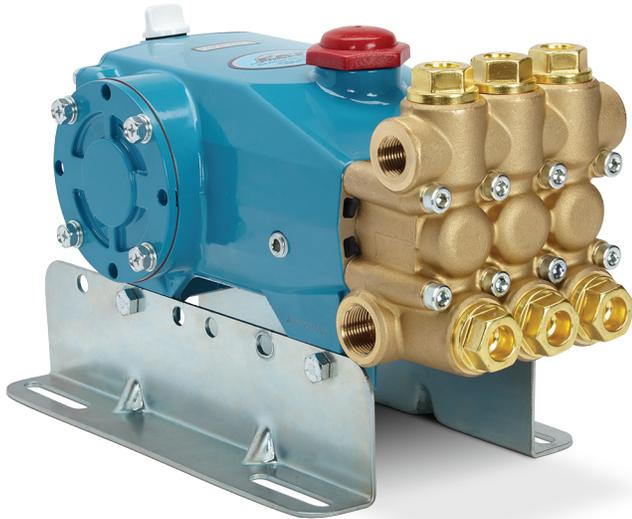

8 GPM | 3,500 PSI

Designed for the Most Demanding High-Pressure Applications

Cat Pumps are the #1 choice for high-pressure applications when quality counts. Don't fall into the price trap by choosing a less expensive pump upfront that will cost more in the long run. Get more work done without the hassles and downtime — choose Cat Pumps.

Building on over 50 years of experience, research and pump development, Cat Pumps engineers have updated our 7CP Series pumps to meet demanding mobile trailer pressure washing needs. Meticulously-designed internal components like solid ceramic plungers, higher-quality seals, and machined stainless steel valves and seats keep pumps running longer. The drive-end uses matched connecting rods and oversized bearings to provide many hours of trouble-free service.

The 7CP6185CS is what you expect from Cat Pumps — high-quality, dependable products backed by the industry's best customer service and support.

Features

- V-packings and low-pressure seals are completely lubricated and cooled, greatly increasing pump life
- Flexible drive options
 - Electric motor (belt with standard pulley or clutch)
 - Gas or diesel engine (belt with standard pulley or clutch)
 - Hydraulic motor (direct drive with bell housing and flex coupler)

Typical Applications:


- Mobile Pressure Wash
- Surface Preparation
- Water Jetting
- Hydro Excavation
- Wash Down

Specifications

	US MEASURE	METRIC MEASURE
Flow	8.0 gpm	30.4 lpm
Pressure	3500 psi	241 bar
Pump RPM*	1320 rpm	1320 rpm
Inlet Pressure Range	Flooded to 70 psi	Flooded to 4.8 bar
Max Liquid Temperature	140° F	60° C
Inlet Ports (2)	¾" NPT(F)	¾" NPT(F)
Discharge Ports (2)	½" NPT(F)	½" NPT(F)
Weight	30.8 lbs	14 kg
Dimensions	13.48 x 9.21 x 6.83"	343 x 234 x 174 mm

*Pump minimum is 100 RPM.

Dimensions

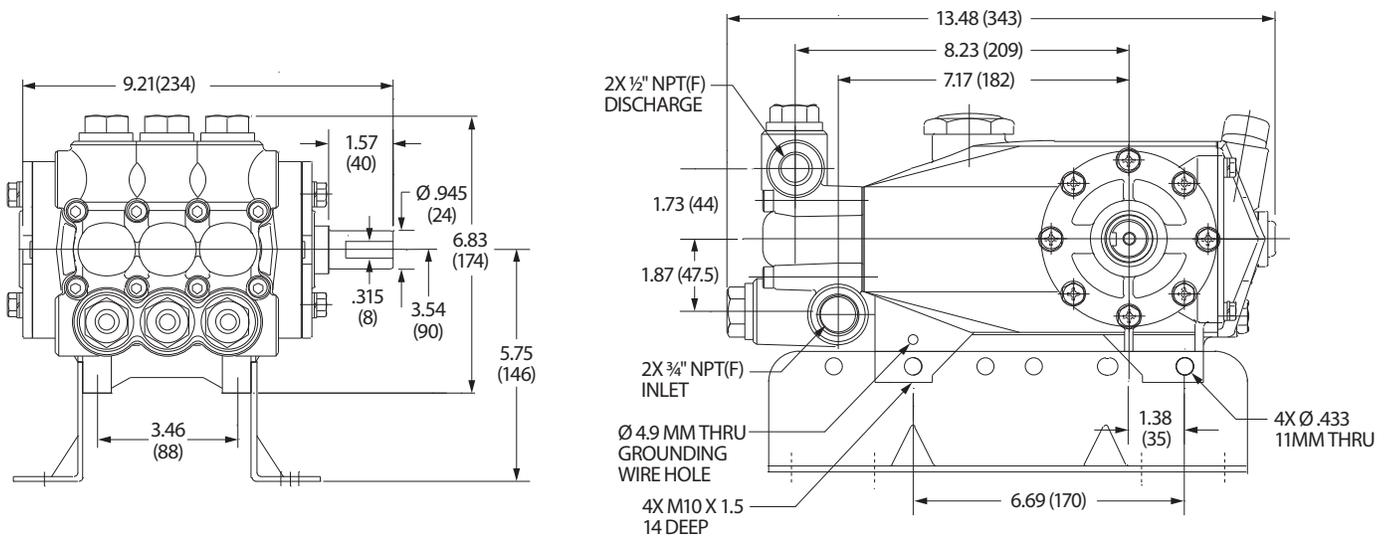

Popular Accessories



Unloader
PN 7542
1 – 21 gpm
406 – 4060 psi



Pop-Off Valve
PN 9940
0 – 25 gpm
1000 – 4000 psi



Pressure Gauge
PN 6089
0 – 6000 psi



Thermal Valve
PN 7142
25 gpm Max
145° F



Oil
PN 6107
21 oz Bottle
Specially-Formulated
for Extended Protection

Contact Cat Pumps for more information at info@catpumps.com or (763) 780-5440



CAT PUMPS
1681 – 94TH LANE N.E. MINNEAPOLIS, MN 55449-4324
PHONE (763) 780-5440 — FAX (763) 780-2958
info@catpumps.com | www.catpumps.com